


Oliato - Pre-finished

DATA SHEET

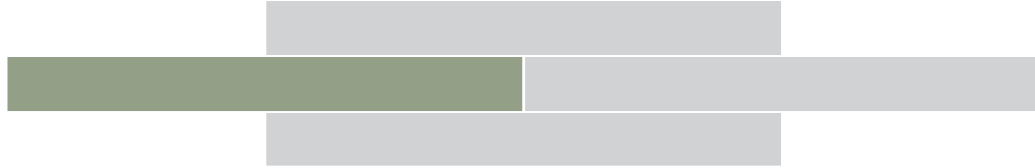

FINISH	Pre-finished with seven coats of Woca Denmark UV oil.
	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;">  <p>Living Brushed Danish White</p> </div> <div style="text-align: center;">  <p>Living Brushed Greymist</p> </div> <div style="text-align: center;">  <p>Rustic Brushed Mink Grey</p> </div> </div> <div style="text-align: center; margin-top: 20px;">  <p>Rustic Greymist</p> </div>

PRODUCT DETAILS	
Construction	Engineered
Species	Oak
Grade	Rustic and Living
Pattern	Strip pattern
	
Profile	Tongue and groove
Edge Profile	Bevelled edge
Top Layer	4mm solid European oak
Backing	Birch and poplar multiply

PLANK SIZES							
	<table border="1"> <thead> <tr> <th>Thickness</th> <th>Width</th> <th>Length</th> </tr> </thead> <tbody> <tr> <td>15/4 x</td> <td>220 x</td> <td>2200mm</td> </tr> </tbody> </table>	Thickness	Width	Length	15/4 x	220 x	2200mm
Thickness	Width	Length					
15/4 x	220 x	2200mm					

INSTALLATION METHOD	
	Glue Down Elastomeric
	Floated on underlay

TECHNICAL CRITERIA	
Origin	Europe
Responsible Certification	FSC Certification No. SGS-COC-006653
Formaldehyde	Emission E1
Pentachlorophenol	Emission <5ppm
Slip Testing	65 PTV
European reaction to fire classification	Cfl-s1
Thermal Conductivity	0.17 W/m
Underfloor Heating	Temperature compliant to max 26°C