




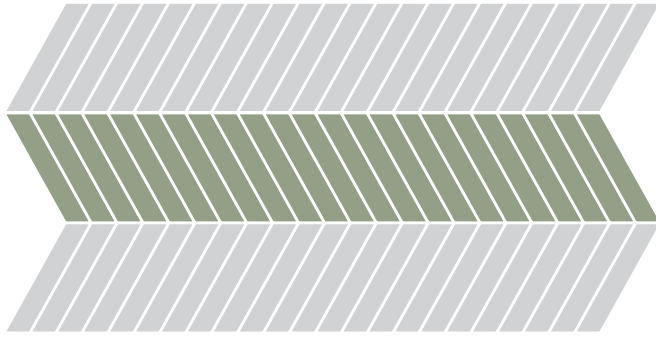


Chevron - Unfinished

DATA SHEET



FINISH	These are the most popular customised colour options.
	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>White Oil</p> </div> <div style="text-align: center;">  <p>Extra White Hard Wax</p> </div> <div style="text-align: center;">  <p>Natural Oil</p> </div> </div> <div style="display: flex; justify-content: space-around; align-items: center; margin-top: 20px;"> <div style="text-align: center;">  <p>Walnut Oil</p> </div> <div style="text-align: center;">  <p>Carbon Black Oil</p> </div> </div>

PRODUCT DETAILS	
Construction	Engineered
Species	Oak
Grade	Living (less knots)
Pattern	Chevron
	
Profile	Tongue and groove
Edge Profile	Bevelled edge
Top Layer	4mm solid European oak
Backing	Birch and poplar multiply

PLANK SIZES							
	<table border="1"> <thead> <tr> <th>Thickness</th> <th>Width</th> <th>Length</th> </tr> </thead> <tbody> <tr> <td>15/4</td> <td>300</td> <td>1848mm</td> </tr> </tbody> </table>	Thickness	Width	Length	15/4	300	1848mm
Thickness	Width	Length					
15/4	300	1848mm					

INSTALLATION METHOD	
	Glue Down Elastomeric

TECHNICAL CRITERIA	
Origin	Europe
Responsible Certification	FSC Certification No. SGS-COC-006653
Formaldehyde	Emission E1
Pentachlorophenol	Emission <5ppm
Slip Testing	65 PTV
European reaction to fire classification	Cfl-s1
Thermal Conductivity	0.17 W/m
Underfloor Heating	Temperature compliant to max 26°C